

02-25-00

A

02/24/00

3674 U.S. PTO

**UTILITY PATENT APPLICATION TRANSMITTAL  
(Large Entity)***(Only for new nonprovisional applications under 37 CFR 1.53(b))*Docket No.  
2204/A14Total Pages in this Submission  
52**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**ENCODING ADDRESSES IN A COMMUNICATION SYSTEM**

and invented by:

Okoziem Allen  
Richard Crump3674 U.S. PTO  
02/24/00  
09/511777If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☐ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 35 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☒ Cross References to Related Applications *(if applicable)*
  - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
  - d. ☐ Reference to Microfiche Appendix *(if applicable)*
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings *(if drawings filed)*
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.  
2204/A14

Total Pages in this Submission  
52

**Application Elements (Continued)**

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☐ Formal                      Number of Sheets \_\_\_\_\_
- b. ☒ Informal                      Number of Sheets                      10
4. ☒ Oath or Declaration
- a. ☐ Newly executed *(original or copy)*                      ☒ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney                      ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under  
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

**Accompanying Application Parts**

8. ☐ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449                      ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class                      ☒ Express Mail *(Specify Label No.):* EL361716614US

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
2204/A14

Total Pages in this Submission  
52

**Accompanying Application Parts (Continued)**

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)

16. ☐ Additional Enclosures (please identify below):


--

**Fee Calculation and Transmittal**

**CLAIMS AS FILED**

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	16	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	4	- 3 =	1	x \$78.00	\$78.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$768.00

- ☐ A check in the amount of \_\_\_\_\_ to cover the filing fee is enclosed.
- ☐ The Commissioner is hereby authorized to charge and credit Deposit Account No. \_\_\_\_\_ as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of \_\_\_\_\_ as filing fee.
  - ☐ Credit any overpayment.
  - ☐ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
  - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

  
Signature

Jeffrey T. Klayman, Reg. No. 39,250  
BROMBERG & SUNSTEIN LLP  
125 Summer Street  
Boston, MA 02110  
(617) 443-9292

Dated: February 24, 2000

CC:

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR UNITED STATES PATENT

FOR

**ENCODING ADDRESSES IN A COMMUNICATION SYSTEM**

Inventor:

**Okoziem Allen**  
R5 Snow Circle  
Nashua, NH 03062

**Richard Crump**  
295 Beacon Street  
Boston, MA 02117

Attorney Docket: 2204/A14 (BA374)

Attorneys:

**BROMBERG & SUNSTEIN LLP**  
125 Summer Street  
Boston, MA 02110  
(617) 443-9292

-1-

## ENCODING ADDRESSES IN A COMMUNICATION SYSTEM

### PRIORITY

5 The present patent application claims priority from the commonly-owned United States Provisional Patent Application No. 60/121,661 entitled CORRELATING DATA STREAMS OF DIFFERENT PROTOCOLS, which was filed on February 25, 1999 in the names of Richard Crump, Janet Doong, Okoziem Allen, and Debra Guttormsen, and is hereby incorporated herein by reference in its entirety.

### CROSS-REFERENCE TO RELATED APPLICATIONS

10 The present patent application may be related to the following commonly-owned United States patent applications, which are hereby incorporated herein by reference in their entireties:

15 U.S. Patent Application No. (2204/169) entitled CORRELATING DATA STREAMS OF DIFFERENT PROTOCOLS, which was filed in the names of Richard Crump and Janet Doong on even date herewith;

20 U.S. Patent Application No. (2204/A12) entitled APPARATUS AND METHOD FOR BINDING A CONNECTION-ORIENTED CLIENT TO A COMMUNICATION CHANNEL, which was filed in the name of Richard Crump on even date herewith; and

25 U.S. Patent Application No. (2204/A13) entitled MANAGING ADDRESSES IN A COMMUNICATION SYSTEM, which was filed in the names of Richard Crump and Debra Guttormsen on even date herewith.

## FIELD OF THE INVENTION

The present invention relates generally to communication systems, and more particularly to encoding addresses and using encoded addresses in a communication system.

## BACKGROUND OF THE INVENTION

In today's computer age, computers and computer peripherals are often internetworked over a communication network. The various devices in the communication network, including the computers, computer peripherals, and various other networking devices, are typically assigned addresses. These addresses are used for communications between the various devices.

In order to operate in the communication network, the various network devices need to obtain and maintain certain types of addressing information. Although some addressing information may be obtained from the other network devices using various communication protocols, and other addressing information may be "learned" through normal operation of the network device, it is common for some addressing information to be configured manually. In any case, it is common for certain addressing information to be stored within each network device.

In a large communication network having many network devices, the amount of addressing information that must be obtained and maintained by the various network devices is often substantial. The large amount of addressing information makes manual configuration of addressing information tedious and error-prone. The large amount of addressing information may require large amounts of memory for storage, and may also have performance implications such as increasing address search times in various address translation and routing tables.

## SUMMARY OF THE INVENTION

In accordance with one aspect of the invention, one or more addresses are encoded into a single regular expression. The regular expression may be used for configuring and/or storing addressing information in a network device.

## BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects and advantages of the invention will be appreciated more fully from the following further description thereof with reference to the accompanying drawings wherein:

FIG. 1 is a block diagram showing an exemplary communication network having multiple X.25 end station devices connecting to one DLSw host device through a router as is known in the art;

FIG. 2 is a block diagram showing an exemplary communication network having multiple X.25 end station devices connecting to one DLSw host device through an enhanced router in accordance with an embodiment of the present invention;

FIG. 3 is a block diagram showing an exemplary communication network having multiple DLSw end station devices connecting to one X.25 host device through a router as is known in the art;

FIG. 4 is a block diagram showing an exemplary communication network having multiple DLSw end station devices connecting to one X.25 host device through an enhanced router in accordance with an embodiment of the present invention;

FIG. 5 is a block diagram showing relevant logic blocks of an exemplary network device in accordance with an embodiment of the present invention;

FIG. 6 is a table describing various wildcard characters that can be used in a regular expression in accordance with an embodiment of the present invention;

FIG. 7 is a table describing various concatenation characters that can be used in a regular expression in accordance with an embodiment of the present invention;

FIG. 8 shows an exemplary address configuration table for mapping multiple X.25 end station devices to one DLSw host device as is known in the art;

FIG. 9 shows an exemplary address configuration table for mapping multiple X.25 end station devices to one DLSw host device using a single address configuration table entry in accordance with an embodiment of the present invention;

FIG. 10 shows an exemplary dynamic routing table for mapping an X.25 end station device to a DLSw host device in accordance with an embodiment of the present invention;

FIG. 11 shows an exemplary address configuration table for mapping multiple DLSw end station devices to one X.25 host device as is known in the art;

FIG. 12 shows an exemplary address configuration table for mapping multiple DLSw end station devices to one X.25 host device using a single address configuration table entry in accordance with an embodiment of the present invention in which the X.25 logical channel number is dynamically allocated from a virtual pool of unused X.25 logical channel numbers;

FIG. 13 shows an exemplary dynamic routing table for mapping a DLSw end station device to an X.25 host device using a dynamically allocated X.25 logical channel number in accordance with an embodiment of the present invention;

FIG. 14 shows an exemplary address configuration table for mapping multiple DLSw end station devices to one X.25 host device using a single address configuration table entry in accordance with an embodiment of the present invention in which the Partner X.121 Address is dynamically allocated from an X.121 address pool;

FIG. 15 shows an exemplary dynamic routing table for mapping a DLSw end station device to an X.25 host device using a dynamically allocated Partner X.121 Address in accordance with an embodiment of the present invention; and

FIG. 16 is a table describing various operators that can be used in a regular expression.

#### DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

In an embodiment of the present invention, addressing information is encoded using regular expressions. A regular expression may be used to represent a single address



or a group of contiguous or non-contiguous addresses. A regular expression may be used for manually configuring addressing information and/or for storing addressing information. Using a regular expression to manually configure addressing information enables a network administrator to represent a group of addresses using a single regular expression, thereby simplifying the task of entering the addressing information. Storing addressing information as a regular expression enables a group of addresses to be consolidated, thereby reducing the amount of memory needed to store the addressing information.

A regular expression is a character string that is used to represent one or more addresses. A regular expression syntax defines various "wildcard" characters or character groups, concatenation characters or character groups, and operation characters that can be used in a regular expression, and also defines the rules for combining actual characters or character groups, "wildcard" characters or character groups, concatenation characters or character groups, and operation characters into a regular expression that represents one or more addresses.

Regular expressions have been used in other contexts to simplify such tasks as finding, listing, and printing. For example, under certain operating systems, an asterisk (\*) may be used as a "wildcard" to match any text string. Therefore, one might enter the command "ls \*.txt" to list all files having the "txt" suffix, or enter the command "print \*.doc" to print all files having the "doc" suffix, or enter the command "find "regular expression" \*.\*" to find all files that contain the text string "regular expression."

An embodiment of the present invention utilizes regular expressions for configuring and storing addressing information. Thus, the regular expression itself is stored in place of one or more actual addresses, for example, in an address table or management information base.

An exemplary regular expression syntax for configuring and storing addresses in a communication network device is disclosed in the provisional patent application number 60/121,661 entitled CORRELATING DATA STREAMS OF DIFFERENT PROTOCOLS, which was incorporated by reference above. The regular expression syntax defines various "wildcard" characters or character groups, concatenation characters or character groups,

and operation characters that can be used in a regular expression, and also defines the rules for combining actual characters or character groups, "wildcard" characters or character groups, concatenation characters or character groups, and operation characters into a regular expression that represents one or more addresses.

5 Except for specific wildcard characters, a character in a regular expression is used to match that character. For example, the regular expression "400000000004" matches only the address "400000000004."

As shown in FIG. 6, a period (.) is a wildcard character that is used to match any single character. For example, the regular expression "40000000000." matches the addresses "400000000000," "400000000001," "400000000002," and so on.

As shown in FIG. 6, a caret (^) is a wildcard character that, when included in the leftmost position of a regular expression, constrains the regular expression to match the leftmost portion of an address, and is therefore referred to as an "anchor."

As shown in FIG. 6, a dollar sign (\$) is a wildcard character that, when included in the rightmost position of a regular expression, constrains the regular expression to match the rightmost portion of an address, and is therefore also referred to as an "anchor."

As shown in FIG. 6 and FIG. 16, a bracketed group can be used to define a group of characters for a single character position within the regular expression. A bracketed group includes an expression that is enclosed within square brackets. For purposes of various concatenation rules that are described below, a bracketed group is treated like a single-character expression.

A bracketed group that includes multiple characters matches any one of the characters at the position in the regular expression at which the bracketed group is included. For example, the bracketed group "[567]" matches a "5," a "6," or a "7" at the position in the regular expression at which the bracketed group is included, such that the regular expression "40000000000[567]" matches the addresses 400000000005, 400000000006, and 400000000007.

A bracketed group that includes an expression beginning with a caret (^) matches any character at the position in the regular expression at which the bracketed group is included EXCEPT for the characters following the caret. For example, the bracketed

-7-

group "[^567]" matches any character except a "5," a "6," or a "7" at the position in the regular expression at which the bracketed group is included.

A bracketed group that includes a minus sign (-) between two characters matches any character at the position in the regular expression at which the bracketed group is included that is in the range of consecutive characters beginning with the leftmost character and ending with the rightmost character. For example, the bracketed group "[5-7]" matches a "5," a "6," or a "7" at the position in the regular expression at which the bracketed group is included, such that the regular expression "40000000000[5-7]" matches the addresses 400000000005, 400000000006, and 400000000007.

As shown in FIG. 16, a parenthetical group can be used to correlate multiple expressions. A parenthetical group includes multiple expressions that are enclosed within parentheses. A parenthetical group matches whatever the enclosed expressions match. For purposes of various concatenation rules that are described below, a parenthetical group is treated like a single expression.

Within a parenthetical group, two expressions separated by a vertical bar (|) matches either expression. For example, the parenthetical group "(12|16)" matches either a "12" or a "16" at the position in the regular expression at which the parenthetical group is included, such that the regular expression "7777(12|16)" matches the addresses 777712 and 777716.

As shown in FIG. 7, a question mark (?) is a concatenation character that matches zero or exactly one occurrence of the expression that immediately precedes it. The preceding expression may be a single character, a wildcard character, a bracketed group, or a parenthetical group. For example, the expression "[0-9]?" matches any string having zero or exactly one digit.

As shown in FIG. 7, an asterisk (\*) is a concatenation character that matches zero or more occurrences of the expression that immediately precedes it. The preceding expression may be a single character, a wildcard character, a bracketed group, or a parenthetical group. For example, the expression "[0-9]\*" matches any string having zero or more digits. The regular expression ".\*" (i.e., the two-character string consisting of a period followed by an asterisk) represents a universal address that matches any and all

addresses, since the period (.) matches any character and the asterisk (\*) indicates zero or more occurrences of any character.

As shown in FIG. 7, a plus sign (+) is a concatenation character that matches one or more occurrences of the expression that immediately precedes it. The preceding  
5 expression may be a single character, a wildcard character, a bracketed group, or a parenthetical group. For example, the expression "[0-9]+" matches any string having one or more digits.

As shown in FIG. 7, a braced group can be used to specify a specific number or range of occurrences of the expression that immediately precedes it. A braced group is enclosed within braces (curly brackets). A braced group of the form "{m}" matches  
10 exactly "m" occurrences of the expression that immediately precedes it. A braced group of the form "{m,}" matches at least "m" occurrences of the expression that immediately precedes it. A braced group of the form "{m,n}" matches at least "m" but no more than "n" occurrences of the expression that immediately precedes it.

In an exemplary embodiment of the present invention, regular expressions may be used to simply the configuration of address mapping information and also to configure address pools. In a typical communication network, it is common for the various network devices in the communication network to include various address mapping tables.  
15 Address mapping tables are used in many contexts. One exemplary address mapping table maps each destination address to a corresponding route, and may be used, for example, for forwarding protocol messages. Another exemplary address mapping table maps an address from one network domain to a corresponding address in another network domain, and may be used, for example, for translating addresses in a network address translator. Yet another exemplary address mapping table maps an address from one protocol to an  
20 address of another protocol, and may be used, for example, for correlating data streams of different protocols. In certain applications, the use of a regular expression in place of multiple addresses in an address mapping table may necessitate that various related addresses be dynamically allocated from an address pool. A regular expression may be used to configure the address pool.

Various aspects of the present invention can be demonstrated by example with reference to a communication system having an X.25 network that is interconnected with a DLSw network through a router or other intermediate network device. In a first exemplary embodiment, multiple X.25 clients in the (source) X.25 network initiate connections to a single DLSw host in the (destination) DLSw network. In a second exemplary embodiment, multiple DLSw clients in the (source) DLSw network initiate connections to a single X.25 host in the (destination) X.25 network.

X.25 is a common packet switching protocol that uses a Packet Layer Protocol (PLP) to perform network routing functions and multiplexing of simultaneous logical connections over a single physical connection. Data Link Switching (DLSw) is a connection-oriented forwarding mechanism for the IBM Systems Network Architecture (SNA). Qualified Logical Link Control (QLLC) is a protocol that allows SNA data to be transported across connection-oriented X.25 networks. Considerable configuration support is required of network router software to implement QLLC for various Data Link Switching (DLSw) protocol network topologies.

Data routing in a connection-oriented protocol such as DLSw is typically based on a Media Access Control (MAC) hardware address that is uniquely associated with each node in the network. However, the X.25 network uses X.121 addresses to identify the source and destination for message streams.

When a router device is used to interconnect a device in one network, such as a connection-oriented DLSw network, with a device in another network, such as a connection-oriented X.25 network, an address configuration table must be configured in order to map each device to the other. For example, when mapping DLSw devices and X.25 devices in a prior art embodiment, the information in the address configuration table includes source and destination MAC addresses for the DLSw devices, and calling and called X.121 addresses for the X.25 devices. One table entry is made in the address table for each pair of interconnected devices. In order to establish a connection between a DLSw device and an X.25 device, a router device refers to the address configuration table entries to establish a dynamic routing mapping, for example in a dynamic routing table, that is used for the two-way exchange of data messages between the mapped devices. At

the end of a communications session, the dynamic routing table entry may be positively deleted by the router, or, may simply “age” out of the dynamic routing table.

Even in a relatively simple network topology, a significant number of address configuration table entries may need to be entered. This may be a tedious, time-consuming process of a network technician with many other pressing tasks to be performed. In addition, entering a large number of addresses by hand is likely to result in a significant number of errors.

Therefore, in an exemplary embodiment of the present invention, a single address configuration table entry maps multiple source devices in a source network to a single destination device in a destination network. The single address configuration table entry is used when any of the source devices initiates a connection to the destination device. The single address configuration table entry includes a “wildcard” for matching the source address of connection requests that are originated by any of the multiple source devices and destined for the destination device. Because the “wildcard” may match multiple source addresses, the single address configuration table entry does not represent a one-to-one mapping of a source device from the source network to a destination device in the destination network. Therefore, in order to establish a connection from a source device in the source network to a destination device in the destination network using the single address configuration table entry, certain address/channel information is dynamically allocated at the time the connection is established, and a dynamic routing table entry is installed in a dynamic routing table in order to map the source device to the destination device using the dynamically allocated address/channel information. In this way, a router or other intermediate network device is able to maintain one address configuration table entry per destination device rather than one address configuration table entry per source device, as in the prior art. Such an arrangement greatly reduces the complexity of configuring address mapping information.

Within the communication system, each client/host device is associated with an X.121 address for the X.25 network as well as a MAC address for the DLSw network. Address mapping information must be configured in order to enable connection establishment between the X.25 devices in the X.25 network and the DLSw devices in the

DLSw network. The router stores the address mapping information in the address configuration table. The router uses the address mapping information in the address configuration table for establishing connections.

In an embodiment of the present invention, the address mapping information is configured differently depending on whether connections are initiated from the X.25 network or from the DLSw network. When connections are initiated from the X.25 network, each address configuration table entry maps one or more (source) X.25 devices in the (source) X.25 network to a single (destination) DLSw device in the (destination) DLSw network. When connections are initiated from the DLSw network, each address configuration table entry maps one or more (source) DLSw devices in the (source) DLSw network to a single (destination) X.25 device in the (destination) X.25 network.

Because the designations "source" and "destination" are relative to the network from which the connections are initiated, it is convenient to introduce the terms "adjacent" and "partner" to describe addresses that are associated with an X.25 device and a DLSw device, respectively. Thus, an address configuration table entry includes, among other things, an Adjacent X.121 Address field, a Partner X.121 Address field, an Adjacent MAC Address field, a Partner MAC Address field, and a Flag field. The Flag field indicates whether the Partner MAC Address field contains an actual MAC address or a regular expression ("wildcard").

When connections are initiated from the X.25 network, the Adjacent X.121 Address field is configured as a "wildcard" using a regular expression in order to match one or more (source) X.25 device addresses. An exemplary embodiment of the present invention utilizes the regular expression ".\*" (i.e., the two-character string consisting of a period followed by an asterisk) as the "wildcard" in order to match any address. The Adjacent MAC Address field is left blank (nil). When a connection is established, the Adjacent MAC Address for the connection is dynamically allocated from a predetermined MAC address pool.

When connections are initiated from the DLSw network, the Partner MAC Address field is configured as a "wildcard" using a regular expression in order to match one or more (source) DLSw device addresses. An exemplary embodiment of the present

invention utilizes the regular expression “.\*” (i.e., the two-character string consisting of a period followed by an asterisk) as the “wildcard” in order to match any address. The Partner X.121 Address field may be configured to be the X.121 address associated with an implied source device (such as the router), in which case an X.25 logical channel number (LCN) is dynamically allocated for the connection when the connection is established, or the Partner X.121 Address field may be left blank (nil), in which case the Partner X.121 Address is dynamically allocated for the connection when the connection is established. Either the X.25 LCN or the Partner X.121 Address is dynamically allocated because each X.25 session is required to have a unique LCN/X.121 pair in order to differentiate the various X.25 sessions. In the former case, the same Partner X.121 Address (i.e., the X.121 address associated with the implied source device) is used for each X.25 session, and therefore a different X.25 LCN is used for each X.25 session in order to distinguish the various X.25 sessions. In the latter case, the same X.25 LCN is used for each X.25 session, and therefore a different Partner X.121 Address is used for each X.25 session in order to distinguish the various X.25 sessions.

Once a connection is established, the router installs a dynamic routing table entry in the dynamic routing table. The dynamic routing table entry includes, among other things, an Adjacent X.121 Address field, a Partner X.121 Address field, an actual or implied X.25 LCN field, an Adjacent MAC Address field, and a Partner MAC Address field. The dynamic routing table entry includes addressing information for mapping a single X.25 device to a single DLSw device including any dynamically allocated address/channel information. The dynamic routing table entry does not include any “wildcard” or “nil” values. The router uses the dynamic routing table entry for forwarding packets between the X.25 device and the DLSw device, irrespective of which side initiated the connection.

Specifically, when a connection is initiated by an X.25 device, the X.25 device specifies a calling X.121 address corresponding to the source X.25 device and a called X.121 address corresponding to the destination DLSw device. The router searches the address configuration table for an address configuration table entry having the Adjacent X.121 Address field matching the calling X.121 address (via a “wildcard”) and the Partner



X.121 Address field equal to the called X.121 address. Upon finding such an address configuration table entry, the router obtains the Partner MAC Address from the address configuration table entry, and allocates an Adjacent MAC Address from the predetermined MAC address pool. The router then attempts to establish a connection to the destination DLSw device using the allocated Adjacent MAC Address as the source MAC address and the Partner MAC Address as the destination MAC address. Assuming the router is able to establish the connection to the destination DLSw device, the router installs a dynamic routing table entry in the dynamic routing table. Within the dynamic routing table entry, the Adjacent X.121 Address field is equal to the calling X.121 address specified by the source X.25 device, the Partner X.121 Address field is equal to the called X.121 address specified by the source X.25 device, the X.25 LCN field is equal to the X.25 LCN associated with the connection (which, in a preferred embodiment, defaults to 1), the Adjacent MAC Address field is equal to the MAC address that the router allocated from the MAC address pool, and the Partner MAC Address field is equal to the Partner MAC Address field from the address configuration table entry.

On the other hand, when a connection is initiated by a DLSw device, the DLSw device specifies a source MAC address corresponding to the source DLSw device and a destination MAC address corresponding to the destination X.25 device. The router searches the address configuration table for an address configuration table entry having the Partner MAC Address field matching the source MAC address (via a "wildcard") and the Adjacent MAC Address field equal to the destination MAC address. Upon finding such an address configuration table entry, the router obtains the Adjacent X.121 Address from the address configuration table entry, and determines from the Partner X.121 Address field whether to dynamically allocate an X.25 LCN for the connection or to dynamically allocate a Partner X.121 Address for the connection. If the Partner X.121 Address field includes a usable X.121 address, then the router dynamically allocates an X.25 LCN from a "virtual pool" of unused X.25 LCNs. If the Partner X.121 Address field is "nil," then the router dynamically allocates a Partner X.121 Address from a predetermined pool of X.121 addresses. In either case, the router then attempts to establish a connection to the destination X.25 device using the Partner X.121 Address as the calling X.121 address and

-14-

the Adjacent X.121 Address as the called X.121 address. Assuming the router is able to establish the connection to the destination X.25 device, the router installs a dynamic routing table entry in the dynamic routing table. If the router dynamically allocated the X.25 LCN, then the Adjacent X.121 Address field is equal to the Adjacent X.121 Address field from the address configuration table entry, the Partner X.121 Address field is equal to the Partner X.121 Address field from the address configuration table entry, the X.25 LCN field is equal to the allocated X.25 LCN, the Adjacent MAC Address field is equal to the destination MAC address specified by the source DLSw device, and the Partner MAC Address field is equal to the source MAC address specified by the source DLSw device. If the router dynamically allocated the Partner X.121 Address, then the Adjacent X.121 Address field is equal to the Adjacent X.121 Address field from the address configuration table entry, the Partner X.121 Address field is equal to the allocated Partner X.121 Address, the X.25 LCN field is equal to a predetermined X.25 LCN, the Adjacent MAC Address field is equal to the destination MAC address specified by the source DLSw device, and the Partner MAC Address field is equal to the source MAC address specified by the source DLSw device.

#### INITIATING A CONNECTION FROM THE X.25 NETWORK

FIG. 1 shows an exemplary prior art communication network **100** having multiple X.25 end station devices initiating connections to one DLSw host device. More specifically, a DLSw network **10** is connected to downstream QLLC compatible X.25 devices **121**, **122**, and **123** via an X.25 network **14** that includes the router device **13**. The DLSw network **10** is also connected via a token ring network **15** to upstream host LLC device SNA mainframe **16**. The personal computer **121** is a QLLC X.25 device having an X.121 address of 77771 and a MAC address of 400000000001. The IBM 3174 **122** is a QLLC X.25 device having an X.121 address of 77773 and a MAC address of 400000000003. The IBM AS/400 **123** is a QLLC X.25 device having an X.121 address of 77772 and a MAC address of 400000000002. The host SNA mainframe **16** is an LLC

-15-

protocol DLSw device having an X.121 address of 4444 and a MAC address of 400000000004. The router **13** has an X.121 address of 7777.

In order for the X.25 devices (**121**, **122**, **123**) to connect to the host SNA mainframe **16**, address mapping information must be configured to map each X.25 device (**121**, **122**, **123**) to the host SNA mainframe **16**. A complete set of address mapping information is configured for each pair of interconnected devices. This address mapping information includes the X.121 addresses and MAC addresses for each pair of interconnected devices. Thus, in a topology where many X.25 client devices need access to a single DLSw host device, address mapping information is configured for each X.25 client device.

FIG. 8 shows an exemplary prior art address configuration table **800** for use in the router device **13** in the network illustrated in FIG. 1. The address configuration table **800** includes three address configuration table entries (**812**, **814**, **816**), one for each X.25 device (**121**, **122**, **123**). Each address configuration table entry (**812**, **814**, **816**) includes a Map Name field **802**, an Adjacent X.121 Address field **804**, a Partner X.121 Address field **804**, an Adjacent MAC Address field **808**, and a Partner MAC Address field **810**. The Map Name field **802** is used to name a specific address configuration table entry. The Adjacent X.121 Address field **804** indicates the X.121 address of the X.25 client device. The Partner X.121 Address field **804** indicates the X.121 address of the DLSw host device. The Adjacent MAC Address field **808** indicates the MAC address of the X.25 client device. The Partner MAC Address field **810** indicates the MAC address of the DLSw host device.

The address configuration table **800** shows three exemplary address configuration table entries, specifically address configuration table entries **812**, **814**, and **816**. Address configuration table entry **812**, which has a Map Name AS400\_map, corresponds to the connection from the IBM AS/400 **123** to the SNA mainframe **16**, and thus includes Adjacent X.121 Address 77772, Partner X.121 Address 4444, Adjacent MAC Address 400000000002, and Partner MAC Address 400000000004. Address configuration table entry **814**, which has a Map Name 3174\_map, corresponds to the connection from the IBM 3174 **122** to the SNA mainframe **16**, and thus includes Adjacent X.121 Address 77773,

-16-

Partner X.121 Address 4444, Adjacent MAC Address 400000000003, and Partner MAC Address 400000000004. Address configuration table entry **816**, which has a Map Name PC\_map, corresponds to the connection from the personal computer workstation PC **122** to the SNA mainframe **16**, and thus includes Adjacent X.121 Address 77771, Partner X.121 Address 4444, Adjacent MAC Address 400000000001, and Partner MAC Address 400000000004.

When, for example, the AS/400 **123** initiates a connection to the SNA mainframe **16**, the AS/400 **123** generates a connection request including, among other things, a calling X.121 address equal to the X.121 address of the AS/400 **123** (77772) and a called X.121 address equal to the X.121 address of the SNA mainframe **16** (4444). When the router device **13** receives this connection request from the AS/400 **123**, the router device **13** searches the address configuration table **800** for an address configuration table entry having an Adjacent X.121 Address **804** matching the calling X.121 address of 77772 and a Partner X.121 Address **806** matching the called X.121 address of 4444. In this example, the router device **13** finds the address configuration table entry **812**.

Upon finding the address configuration table entry **812**, router device **13** obtains the corresponding Adjacent MAC Address **808** of 400000000002 and the corresponding Partner MAC Address **810** of 400000000004 from the address configuration table entry **812**, and attempts to connect to the SNA mainframe **16** using a source MAC address equal to the Adjacent MAC Address **808** of 400000000002 and a destination MAC address equal to the Partner MAC Address **810** of 400000000004.

The communication network **200** shown in FIG. 2 is similar to the communication network **100** shown in FIG. 1, but uses an enhanced router device **23** having an enhanced address configuration table for mapping multiple X.25 devices to a single DLSw device using a single address configuration table entry. More specifically, a DLSw network **20** is connected to downstream QLLC compatible X.25 devices **221**, **222**, and **223** via an X.25 network **24** that includes the enhanced router device **23**. The DLSw network **20** is also connected via a token ring network **25** to upstream host LLC device SNA mainframe **26**. In the network depicted in FIG. 2, the personal computer **221** is a QLLC X.25 device having an X.121 address of 77771. The IBM 3174 **222** is a QLLC X.25 device having an

X.121 address of 77773. The IBM AS/400 **223** is a QLLC X.25 device having an X.121 address of 77772. The X.25 devices (**221, 222, 223**) may be assigned MAC addresses, as in the prior art embodiment shown in FIG. 1, although the X.25 devices (**221, 222, 223**) need not be assigned such MAC addresses, since the enhanced router **23** dynamically assigns MAC addresses for the X.25 devices (**221, 222, 223**) from a MAC address pool. The host SNA mainframe **26** is an LLC protocol DLSw device having an X.121 address of 4444 and a MAC address of 400000000004. The enhanced router **23** has an X.121 address of 7777.

In order for the X.25 devices (**221, 222, 223**) to connect to the host SNA mainframe **26**, a single address configuration table entry that maps all X.25 devices (**221, 222, 223**) to the host SNA mainframe **26** is installed in the address configuration table. The single address configuration table entry includes a "wildcard" for matching all X.25 device addresses, and includes the X.121 address and the MAC address associated with the host SNA mainframe **26**. Thus, address mapping information is configured for the single DLSw host device rather than for each X.25 client device.

FIG. 9 shows an exemplary address configuration table **900** for use in the enhanced router device **23** in the network illustrated in FIG. 2. The address configuration table **900** includes a single address configuration table entry **912** for mapping the X.25 devices (**221, 222, 223**) to the host SNA mainframe **26**. The address configuration table entry **912** includes a Map Name field **902**, an Adjacent X.121 Address field **904**, a Partner X.121 Address field **906**, an Adjacent MAC Address field **908**, a Partner MAC Address field **910**, and a Flag field **911**. The Map Name field **902** includes an address configuration table entry name, which, in this example, is "Host1\_map." The Adjacent X.121 Address field **904** includes a "wildcard" matching all X.25 device addresses. The Partner X.121 Address field **906** includes the X.121 address 4444 that is associated with the host SNA mainframe **26**. The Adjacent MAC Address field **908** is "nil," which indicates that the source MAC address is to be allocated from the MAC address pool. The Partner MAC Address field **910** includes the MAC address 400000000004 that is associated with the host SNA mainframe **26**. The Flag field **911** is zero, which indicates that there is no "wildcard" in the Partner MAC Address field **910**.

When, for example, the AS/400 **223** initiates a connection to the SNA mainframe **26**, the AS/400 **223** generates a connection request including, among other things, a calling X.121 address equal to the X.121 address of the AS/400 **223** (77772) and a called X.121 address equal to the X.121 address of the SNA mainframe **26** (4444). When the enhanced router device **23** receives this connection request from the AS/400 **223**, the enhanced router device **23** searches the address configuration table **900** for an address configuration table entry having an Adjacent X.121 Address **904** matching the calling X.121 address of 77772 and a Partner X.121 Address **906** equal to the called X.121 address of 4444. In this example, the enhanced router device **23** finds the address configuration table entry **912**.

Upon finding the address configuration table entry **912**, enhanced router device **23** obtains the corresponding Partner MAC Address **910** of 400000000004 from the address configuration table entry **912**, but is unable to obtain an Adjacent MAC Address from the address configuration table entry **912** since the Adjacent MAC Address field **908** is "nil." Therefore, the enhanced router device **23** allocates the Adjacent MAC Address from a MAC address pool. For example, assume that the enhanced router device **23** allocates the MAC address 400000000005 from a MAC address pool containing the MAC addresses 400000000005, 400000000006, and 400000000007. The enhanced router device **23** then attempts to connect to the host SNA mainframe **26** using a source MAC address equal to the allocated Adjacent MAC Address of 400000000005 and a destination MAC address equal to the Partner MAC Address **910** of 400000000004. If the enhanced router device **23** is able to establish the connection to the host SNA mainframe **26**, then the enhanced router device **23** installs a dynamic routing table entry in the dynamic routing table mapping the AS/400 **223** to the host SNA mainframe **26**.

FIG. 10 shows an exemplary dynamic routing table **1000** including a dynamic routing table entry **1012** mapping the AS/400 **223** to the host SNA mainframe **26**. The dynamic routing table entry **1012** includes an Adjacent X.121 Address field **1004** equal to the calling X.121 address of 77772, a Partner X.121 Address field **1006** equal to the called X.121 address of 4444, an X.25 LCN field **1007** equal to a predetermined X.25 LCN of 1, an Adjacent MAC Address field **1008** equal to the allocated Adjacent MAC Address of 400000000005, and a Partner MAC Address field **1010** equal to the Partner MAC Address

of 400000000004. The enhanced router device **23** uses the dynamic routing table entry **1012** to translate between X.121 addresses and MAC address for communication between the AS/400 **223** and the host SNA mainframe **26**. For example, when the enhanced router device **23** receives an X.25 packet from the AS/400 **223** including a calling X.121 address of 77772 and a called X.121 address of 4444, the enhanced router device **23** uses the dynamic routing table entry **1012** to translate the calling X.121 address of 77772 into a source MAC address of 400000000005 and to translate the called X.121 address of 4444 into a destination MAC address of 400000000004. Similarly, when the enhanced router device **23** receives a DLSw packet from the host SNA mainframe **26** including a source MAC address of 400000000004 and a destination MAC address of 400000000005, the enhanced router device **23** uses the dynamic routing table entry **1012** to translate the source MAC address of 400000000004 into a calling X.121 address of 4444 and to translate the destination MAC address of 400000000005 into a called X.121 address of 77772.

#### INITIATING A CONNECTION FROM THE DLSw NETWORK

FIG. 3 shows an exemplary prior art communication network **300** having multiple DLSw end station devices initiating connections to one X.25 host device. More specifically, a DLSw network **30** is connected to an upstream QLLC X.25 device host **32** via an X.25 network **34** that includes the router device **33**. The DLSw network **30** is also connected via a token ring network **35** to downstream LLC-attached SNA end stations **361**, **362**, and **363**. The personal computer **361** is an LLC-attached DLSw device having a MAC address of 400000000001 and an X.121 address of 77771. The IBM 3174 **362** is an LLC-attached DLSw device having a MAC address of 400000000003 and an X.121 address of 77773. The IBM AS/400 **363** is an LLC-attached DLSw device having a MAC address of 400000000002 and an X.121 address of 77772. The host SNA mainframe **32** is a QLLC X.25 device having a MAC address of 400000000004 and an X.121 address of 3745. The router **33** has an X.121 address of 7777.

-20-

In order for the DLSw devices (**361, 362, 363**) to connect to the host SNA mainframe **32**, address mapping information must be configured to map each DLSw device (**361, 362, 363**) to the host SNA mainframe **32**. A complete set of address mapping information is configured for each pair of interconnected devices. This address mapping information includes the X.121 addresses and MAC addresses for each pair of interconnected devices. Thus, in a topology where many DLSw devices need access to a single X.25 host device, address mapping information is configured for each DLSw client device.

FIG. 11 shows an exemplary prior art QLLC address configuration mapping table **1100** for use in the router device **33** in the network illustrated in FIG. 3. The address configuration table **1100** includes three address configuration table entries (**1112, 1114, 1116**), one for each DLSw device (**361, 362, 363**). Each address configuration table entry (**1112, 1114, 1116**) includes a Map Name field **1102**, an Adjacent X.121 Address field **1104**, a Partner X.121 Address field **1106**, an Adjacent MAC Address field **1108**, and a Partner MAC Address field **1110**. The Map Name field **1102** is used to name a specific address configuration table entry. The Adjacent X.121 Address **1104** indicates the X.121 address of the X.25 host device. The Partner X.121 Address **1106** indicates the X.121 address of the DLSw client device. The Adjacent MAC Address **1108** indicates the MAC address of the X.25 host device. The Partner MAC Address **1110** indicates the MAC address of the DLSw client device.

The address configuration table **1100** shows three exemplary address configuration table entries, specifically address configuration table entries **1112, 1114, and 1116**. Address configuration table entry **1112**, which has a Map Name AS400\_map, corresponds to the connection from the IBM AS/400 **363** to the SNA mainframe **32**, and thus includes Adjacent X.121 Address 3745, Partner X.121 Address 77772, Adjacent MAC Address 400000000004, and Partner MAC Address 400000000002. Address configuration table entry **1114**, which has a Map Name 3174\_map, corresponds to the connection from the IBM 3174 **362** to the SNA mainframe **32**, and thus includes Adjacent X.121 Address 3745, Partner X.121 Address 77773, Adjacent MAC Address 400000000004, and Partner MAC Address 400000000003. Address configuration table entry **1116**, which has a Map



-21-

Name PC\_map, corresponds to the connection from the personal computer workstation PC **361** to the SNA mainframe **32**, and thus includes Adjacent X.121 Address 3745, Partner X.121 Address 77771, Adjacent MAC Address 400000000004, and Partner MAC Address 400000000001.

When, for example, the AS/400 **363** initiates a connection to the SNA mainframe **32**, the AS/400 **363** generates a connection request including, among other things, a source MAC address equal to the MAC address of the AS/400 **363** (400000000002) and a destination MAC address equal to the MAC address of the SNA mainframe **32** (400000000004). When the router device **33** receives this connection request from the AS/400 **363**, the router device **33** searches the address configuration table **1100** for an address configuration table entry having a Partner MAC Address **1110** matching the source MAC address of 400000000002 and an Adjacent MAC Address **1108** matching the destination MAC address of 400000000004. In this example, the router device **33** finds the address configuration table entry **1112**.

Upon finding the table entry **1112**, router device **33** obtains the corresponding Partner X.121 Address **1106** of 77772 and the corresponding Adjacent X.121 Address **1104** of 3745 from the address configuration table entry **1112**, and attempts to connect to the SNA mainframe **32** using a calling X.121 address equal to the Partner X.121 Address **1106** of 77772 and a called X.121 address equal to the Adjacent X.121 Address **1104** of 3745.

The communication network **400** shown in FIG. 4 is similar to the communication network **300** shown in FIG. 3, but uses an enhanced router device **43** having an enhanced address configuration table for mapping multiple DLSw devices to a single X.25 device using a single address configuration table entry. More specifically, a DLSw network **40** is connected to an upstream QLLC X.25 device host **42** via an X.25 network **44** that includes the enhanced router device **43**. The DLSw network **40** is also connected via a token ring network **45** to downstream LLC-attached SNA end stations **461**, **462**, and **463**. The personal computer **461** is an LLC-attached DLSw device having a MAC address of 400000000001. The IBM 3174 **462** is an LLC-attached DLSw device having a MAC address of 400000000003. The IBM AS/400 **463** is an LLC-attached DLSw device having

a MAC address of 400000000002. The DLSw devices (**461**, **462**, **463**) may be assigned X.121 addresses, as in the prior art embodiment shown in FIG. 3, although the DLSw devices (**461**, **462**, **463**) need not be assigned such X.121 addresses, since the enhanced router **43** either dynamically assigns X.121 addresses for the DLSw devices (**461**, **462**, **463**) from an X.121 address pool or uses the X.121 address of the enhanced router **43**. The host SNA mainframe **42** is a QLLC X.25 device having a MAC address of 400000000004 and an X.121 address of 3745. The enhanced router **43** has an X.121 address of 7777.

In order for the DLSw devices (**461**, **462**, **463**) to connect to the host SNA mainframe **42**, a single address configuration table entry that maps all DLSw devices (**461**, **462**, **463**) to the host SNA mainframe **42** is installed in the address configuration table. The single address configuration table entry includes a "wildcard" for matching all DLSw device addresses, and includes the X.121 address and the MAC address associated with the host SNA mainframe **42**. Thus, address mapping information is configured for the single X.25 host device rather than for each DLSw client device.

In one embodiment of the invention, the enhanced router device **43** uses the same Partner X.121 Address for all connections and dynamically allocates a different X.25 LCN for each connection. In another embodiment of the invention, the enhanced router device **43** uses the same X.25 LCN for all connections and dynamically allocates a different Partner X.121 Address for each connection. An example of each scheme is described below.

#### DYNAMICALLY ALLOCATE X.25 LCN

FIG. 12 shows an exemplary address configuration table **1200** for use in the enhanced router device **43** when the enhanced router device **43** dynamically allocates the X.25 LCNs. The address configuration table **1200** includes a single address configuration table entry **1212** for mapping the DLSw devices (**461**, **462**, **463**) to the host SNA mainframe **42**. The address configuration table entry **1212** includes a Map Name field **1202**, an Adjacent X.121 Address field **1204**, a Partner X.121 Address field **1206**, an

-23-

Adjacent MAC Address field **1208**, a Partner MAC Address field **1210**, and a Flag field **1211**. The Map Name field **1202** includes an address configuration table entry name, which, in this example, is "NPSI\_host." The Adjacent X.121 Address field **1204** includes the X.121 address 3745 that is associated with the host SNA mainframe **42**. The Partner X.121 Address field **1206** includes the X.121 address 7777 that is associated with the enhanced router **43**. The Adjacent MAC Address field **1208** includes the MAC address 400000000004 that is associated with the host SNA mainframe **42**. The Partner MAC Address field **1210** includes a "wildcard" matching all DLSw device addresses. The Flag field **1211** is equal to one, which indicates that there is a "wildcard" in the Partner MAC Address field **1210**.

When, for example, the AS/400 **463** initiates a connection to the SNA mainframe **42**, the AS/400 **463** generates a connection request including, among other things, a source MAC address equal to the MAC address of the AS/400 **463** (400000000002) and a destination MAC address equal to the MAC address of the SNA mainframe **42** (400000000004). When the enhanced router device **43** receives this connection request from the AS/400 **463**, the enhanced router device **43** searches the address configuration table **1200** for an address configuration table entry having a Partner MAC Address **1210** matching the source MAC address of 400000000002 and an Adjacent MAC Address **1208** matching the destination MAC address of 400000000004. In this example, the enhanced router device **43** finds the address configuration table entry **1212**.

Upon finding the table entry **1212**, enhanced router device **43** obtains the corresponding Partner X.121 Address **1206** of 7777 and the corresponding Adjacent X.121 Address **1204** of 3745 from the address configuration table entry **1212**, and dynamically allocates an X.25 LCN from among the "virtual pool" of unused X.25 LCNs. For example, assume that the enhanced router device **43** allocates the X.25 LCN 2. The enhanced router device **43** then attempts to connect to the SNA mainframe **42** over the dynamically allocated X.25 LCN 2 using a calling X.121 address equal to the Partner X.121 Address **1406** of 7777 and a called X.121 address equal to the Adjacent X.121 Address **1404** of 3745. If the enhanced router device **43** is able to establish the connection to the host SNA mainframe **42**, then the enhanced router device **43** installs a dynamic

-24-

routing table entry in the dynamic routing table mapping the AS/400 **463** to the host SNA mainframe **42**.

FIG. 13 shows an exemplary dynamic routing table **1300** including a dynamic routing table entry **1312** mapping the AS/400 **463** to the host SNA mainframe **42**. The dynamic routing table entry **1312** includes an Adjacent X.121 Address field **1304** equal to the Adjacent X.121 Address of 3745, a Partner X.121 Address field **1306** equal to the Partner X.121 Address of 7777, an X.25 LCN field **1307** equal to the dynamically allocated X.25 LCN of 2, an Adjacent MAC Address field **1308** equal to the Adjacent MAC Address of 400000000004, and a Partner MAC Address field **1310** equal to the source MAC address of 400000000002. The enhanced router device **43** uses the dynamic routing table entry **1312** to translate between X.121 addresses and MAC address for communication between the AS/400 **463** and the host SNA mainframe **42**. For example, when the enhanced router device **43** receives an X.25 packet from the host SNA mainframe **42** including a calling X.121 address of 3745 and a called X.121 address of 7777 over X.25 LCN 2, the enhanced router device **43** uses the dynamic routing table entry **1312** to translate the calling X.121 address of 3745 into a source MAC address of 400000000004 and to translate the called X.121 address of 7777 into a destination MAC address of 400000000002. Similarly, when the enhanced router device **43** receives a DLSw packet from the AS/400 **463** including a source MAC address of 400000000002 and a destination MAC address of 400000000004, the enhanced router device **43** uses the dynamic routing table entry **1312** to obtain the X.25 LCN of 2 and to translate the source MAC address of 400000000002 into a calling X.121 address of 7777 and the destination MAC address of 400000000004 into a called X.121 address of 3745.

#### DYNAMICALLY ALLOCATE PARTNER X.121 ADDRESS

FIG. 14 shows an exemplary address configuration table **1400** for use in the enhanced router device **43** when the enhanced router device **43** dynamically allocates the Partner X.121 Address. The address configuration table **1400** includes a single address configuration table entry **1412** for mapping the DLSw devices (**461**, **462**, **463**) to the host

SNA mainframe **42**. The address configuration table entry **1412** includes a Map Name field **1402**, an Adjacent X.121 Address field **1404**, a Partner X.121 Address field **1406**, an Adjacent MAC Address field **1408**, a Partner MAC Address field **1410**, and a Flag field **1411**. The Map Name field **1402** includes an address configuration table entry name, which, in this example, is "NPSI\_host." The Adjacent X.121 Address field **1404** includes the X.121 address 3745 that is associated with the host SNA mainframe **42**. The Partner X.121 Address field **1406** is blank (nil). The Adjacent MAC Address field **1408** includes the MAC address 400000000004 that is associated with the host SNA mainframe **42**. The Partner MAC Address field **1410** includes a "wildcard" matching all DLSw device addresses. The Flag field **1411** is equal to one, which indicates that there is a "wildcard" in the Partner MAC Address field **1410**.

When, for example, the AS/400 **463** initiates a connection to the SNA mainframe **42**, the AS/400 **463** generates a connection request including, among other things, a source MAC address equal to the MAC address of the AS/400 **463** (400000000002) and a destination MAC address equal to the MAC address of the SNA mainframe **42** (400000000004). When the enhanced router device **43** receives this connection request from the AS/400 **463**, the enhanced router device **43** searches the address configuration table **1400** for an address configuration table entry having a Partner MAC Address **1410** matching the source MAC address of 400000000002 and an Adjacent MAC Address **1408** matching the destination MAC address of 400000000004. In this example, the enhanced router device **43** finds the address configuration table entry **1412**.

Upon finding the table entry **1412**, enhanced router device **43** obtains the corresponding Adjacent X.121 Address **1404** of 3745 from the address configuration table entry **1412**, but is unable to obtain the corresponding Partner X.121 Address from the address configuration table entry **1412** since the Partner X.121 Address **1406** is "nil." Therefore, the enhanced router device **43** allocates the Partner X.121 Address from a pool of X.121 addresses. For example, assume that the enhanced router device **43** allocates the X.121 address 8888 from a pool of X.121 addresses. The enhanced router device **43** then attempts to connect to the SNA mainframe **42** over the predetermined X.25 LCN 1 using a calling X.121 address equal to the dynamically allocated Partner X.121 Address of 8888

and a called X.121 address equal to the Adjacent X.121 Address **1404** of 3745. If the enhanced router device **43** is able to establish the connection to the host SNA mainframe **42**, then the enhanced router device **43** installs a dynamic routing table entry in the dynamic routing table mapping the AS/400 **463** to the host SNA mainframe **42**.

FIG. 15 shows an exemplary dynamic routing table **1500** including a dynamic routing table entry **1512** mapping the AS/400 **463** to the host SNA mainframe **42**. The dynamic routing table entry **1512** includes an Adjacent X.121 Address field **1504** equal to the Adjacent X.121 Address of 3745, a Partner X.121 Address field **1506** equal to the dynamically allocated Partner X.121 Address of 8888, an X.25 LCN field **1507** equal to the predetermined X.25 LCN of 1, an Adjacent MAC Address field **1508** equal to the Adjacent MAC Address of 400000000004, and a Partner MAC Address field **1510** equal to the source MAC address of 400000000002. The enhanced router device **43** uses the dynamic routing table entry **1512** to translate between X.121 addresses and MAC address for communication between the AS/400 **463** and the host SNA mainframe **42**. For example, when the enhanced router device **43** receives an X.25 packet from the host SNA mainframe **42** including a calling X.121 address of 3745 and a called X.121 address of 8888 over X.25 LCN 1, the enhanced router device **43** uses the dynamic routing table entry **1512** to translate the calling X.121 address of 3745 into a source MAC address of 400000000004 and to translate the called X.121 address of 8888 into a destination MAC address of 400000000002. Similarly, when the enhanced router device **43** receives a DLSw packet from the AS/400 **463** including a source MAC address of 400000000002 and a destination MAC address of 400000000004, the enhanced router device **43** uses the dynamic routing table entry **1312** to obtain the X.25 LCN of 1 and to translate the source MAC address of 400000000002 into a calling X.121 address of 8888 and the destination MAC address of 400000000004 into a called X.121 address of 3745.

#### AN EXEMPLARY NETWORK DEVICE

FIG. 5 is a block diagram showing the relevant logic blocks of an exemplary network device **500**, such as the enhanced router device **23** shown in FIG. 2 or the

enhanced router device **43** shown in FIG. 4. The network device **500** includes, among other things, an X.25 Interface **502**, Switching/Routing Logic **504**, a DLSw Interface **506**, one or more Address Pools **508**, Connection Control Logic **510**, a Dynamic Routing Table **512**, an Address Configuration Table **514**, a Management Information Base (MIB) **516**, and a Management Agent **518**. The Connection Control Logic **510** establishes connections between X.25 devices and DLSw devices. The Connection Control Logic **510** is coupled to the Address Configuration Table **514** and to the Address Pools **508**. The Connection Control Logic **510** utilizes the Address Configuration Table **514** to establish the connections, which may include dynamically allocating an Adjacent MAC Address or a Partner X.121 Address from the Address Pools **508**. Upon establishing a connection, the Connection Control Logic **510** installs a dynamic routing table entry in the Dynamic Routing Table **512**. The Switching/Routing Logic **504** utilizes the Dynamic Routing Table **512** for forwarding packets between the X.25 Interface **502** and the DLSw Interface **506**.

In an exemplary embodiment of the invention, the address mapping information in the Address Configuration Table **514** and the MAC addresses in the MAC address pool **508** are managed through Management Information Bases (MIBs) **516**, which are accessible through the Management Agent **518**. The Management Agent **518** is typically a Simple Network Management Protocol (SNMP) agent, in which case the MIBs **516** are SNMP MIBs. Exemplary SNMP MIBs for managing the Address Configuration Table **514** and for managing the MAC address pool **508** are shown and described in the related patent application entitled MANAGING ADDRESSES IN A COMMUNICATION SYSTEM, which was incorporated by reference above.

Within the network device **500**, regular expressions may be used to configure the Adjacent X.121 Address for X.25-to-DLSw connections or the Partner MAC Address for DLSw-to-X.25 connections. Regular expressions may also be used to configure the MAC address pool or X.121 address pool. For example, the regular expression “.” may be configured as the Adjacent X.121 Address in order to map all X.25 devices to a single DLSw device, or the regular expression “.” may be configured as the Partner MAC Address in order to map all DLSw devices to a single X.25 device. A regular expression

-28-

such as "40000000000[567]" may be used to configure a MAC address pool including the addresses 400000000005, 400000000006, and 400000000007.

In the exemplary embodiments of the invention described herein, there are certain rules for configuring the addressing information, and in particular for using regular expressions for encoding the Adjacent X.121 Address or the Partner MAC Address. First of all, either the Adjacent X.121 Address field or the Partner MAC Address field may be configured using a regular expression, but not both. A regular expression in the Adjacent X.121 Address field replaces and represents one or more X.121 addresses, where each X.121 address comprises from 1 to 15 decimal digits. A regular expression in the Partner MAC Address field replaces and represents one or more MAC addresses, where each MAC address comprises 12 hexadecimal digits. If the Partner MAC Address field is configured using a regular expression, then the Flag field (MIB management object wfX25QllcAddrMapOptions at the bit position corresponding to the decimal value 4) must be set so that the Connection Control Logic 510 will not mistake the regular expression for an actual MAC address.

#### ALTERNATIVE EMBODIMENTS

As described herein, regular expressions may be used for configuring and storing address configuration information and also for configuring address pools. However, the present invention is in no way limited to such uses. Regular expressions can be used in many other contexts for configuring and storing addressing information. For example, a regular expression may be used in a routing table to consolidate routing information for addresses belonging to a particular Forwarding Equivalence Class (FEC). A regular expression may also be used to define group membership, for example, for a multicast group or distribution list. These and other applications that utilize a regular expression for configuring and/or storing addressing information are intended to fall within the scope of the invention.

One regular expression syntax is described herein for use in configuring and storing addressing information in a network device. However, the present invention is in



no way limited to any particular regular expression syntax. There are other regular expression syntaxes, such as "Unix" regular expressions and regular expressions described in the book entitled Mastering Regular Expressions written by Jeffrey E. Friedl and published by O'Reilly Publishing (incorporated herein by reference in its entirety), that can be used in whole or in part for use in configuring and storing addressing information in a network device.

Even though the preceding discussion of using regular expressions for configuring and storing addressing information has been in the context of a "router", other types of computer network devices could also benefit, including, but not limited to, switches, gateways, bridges, bridge-routers, etc. One specific embodiment is exemplified in the BayRS version 12.10 router software program sold by Nortel Networks, described in the Nortel Networks technical documentation entitled *Configuring X.25 Services*, Nortel Networks part no. 11737-B Rev. 00, the entirety of which is hereby incorporated herein by reference.

Although various embodiments are described herein with reference to a communication system having an X.25 network that is interconnected with a DLSw network through a router, it should be noted that the present invention is in no way limited to any particular network topology or network protocols.

In an exemplary embodiment of the present invention, predominantly all of the connection control logic and management agent logic described herein is implemented as a set of computer program instructions that are stored in a computer readable medium and executed by an embedded microprocessor system within the network device. Various embodiments of the invention may be implemented in any conventional computer programming language. For example, an embodiment may be implemented in a procedural programming language (e.g., "C") or an object oriented programming language (e.g., "C++"). Alternative embodiments of the invention may be implemented using discrete components, integrated circuitry, programmable logic used in conjunction with a programmable logic device such as a Field Programmable Gate Array (FPGA) or microprocessor, or any other means including any combination thereof.

Alternative embodiments of the invention may be implemented as a computer program product for use with a computer system. Such implementation may include a series of computer instructions fixed either on a tangible medium, such as a computer readable media (*e.g.*, a diskette, CD-ROM, ROM, or fixed disk), or fixed in a computer data signal embodied in a carrier wave that is transmittable to a computer system via a modem or other interface device, such as a communications adapter connected to a network over a medium. The medium may be either a tangible medium (*e.g.*, optical or analog communications lines) or a medium implemented with wireless techniques (*e.g.*, microwave, infrared or other transmission techniques). The series of computer instructions embodies all or part of the functionality previously described herein with respect to the system. Those skilled in the art should appreciate that such computer instructions can be written in a number of programming languages for use with many computer architectures or operating systems. Furthermore, such instructions may be stored in any memory device, such as semiconductor, magnetic, optical or other memory devices, and may be transmitted using any communications technology, such as optical, infrared, microwave, or other transmission technologies. It is expected that such a computer program product may be distributed as a removable medium with accompanying printed or electronic documentation (*e.g.*, shrink wrapped software), preloaded with a computer system (*e.g.*, on system ROM or fixed disk), or distributed from a server or electronic bulletin board over the network (*e.g.*, the Internet or World Wide Web).

The present invention may be embodied in other specific forms without departing from the essence or essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive.

-31-

We claim:

1. A method for representing addressing information in a communication system, the method comprising encoding at least one address using a regular expression and using the regular expression in place of the at least one address.
2. The method of claim 1, wherein the at least one address comprises at least one X.121 address.
3. The method of claim 2, wherein using the regular expression in place of the at least one address comprises storing the regular expression in a source address field of an address configuration table.
4. The method of claim 1, wherein the at least one address comprises at least one MAC address.
5. The method of claim 4, wherein using the regular expression in place of the at least one address comprises storing the regular expression in a source address field of an address configuration table.
6. The method of claim 1, wherein using the regular expression in place of the at least one address comprises using the regular expression to specify at least one address of an address pool.
7. The method of claim 1, wherein using the regular expression in place of the at least one address comprises storing the regular expression in a management information base.

-32-

8. A network device comprising a storage including a regular expression representing at least one address.

9. The network device of claim 8, wherein the storage comprises an address configuration table.

10. The network device of claim 9, wherein the regular expression defines a source address group.

11. The network device of claim 8, wherein the storage comprises a management information base.

12. The network device of claim 11, wherein the regular expression defines an address pool.

13. The network device of claim 8, wherein the storage comprises a routing table.

14. The network device of claim 11, wherein the regular expression defines a forwarding equivalence class for a routing table entry.

-33-

15. An address configuration table for mapping a plurality of source devices in a source network to a single destination device in a destination network, the address configuration table comprising an address configuration table entry having a regular expression representing a plurality of source device addresses.

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2216  
2217

-34-

16. A management information base comprising a management object for storing a regular expression representing at least one address.

17. A management information base comprising a management object for storing a regular expression representing at least one address.

-35-

### ABSTRACT OF THE DISCLOSURE

One or more addresses are encoded into a single regular expression. The regular  
5 expression may be used for configuring and/or storing addressing information in a network  
device.

Downstream Side

Upstream Side

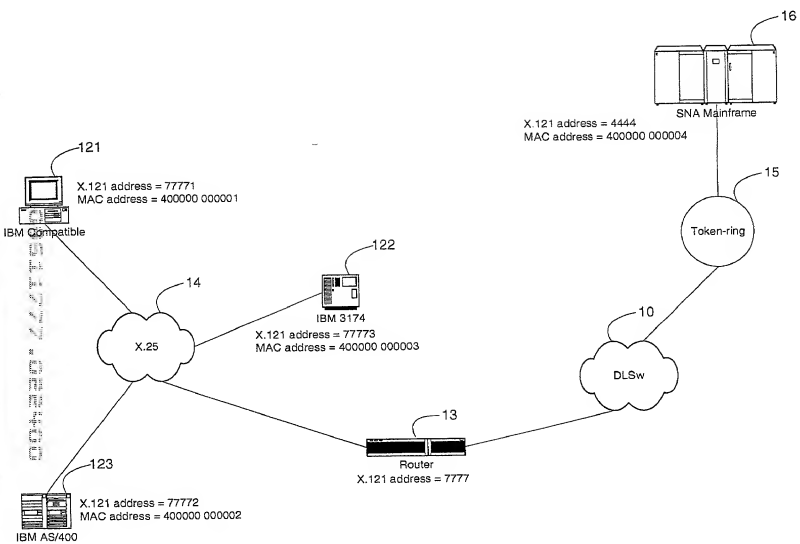


FIG. 1 100

PRIOR ART



Downstream Side

Upstream Side

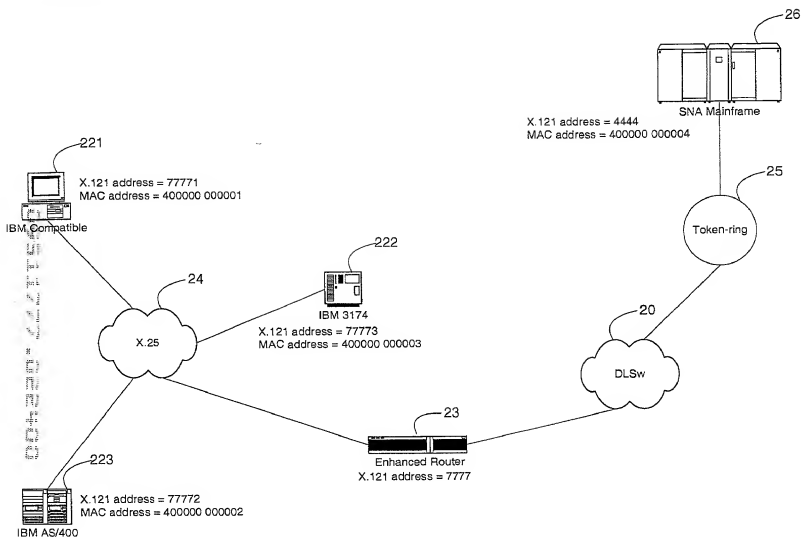


FIG. 2 200

Upstream Side

Downstream Side

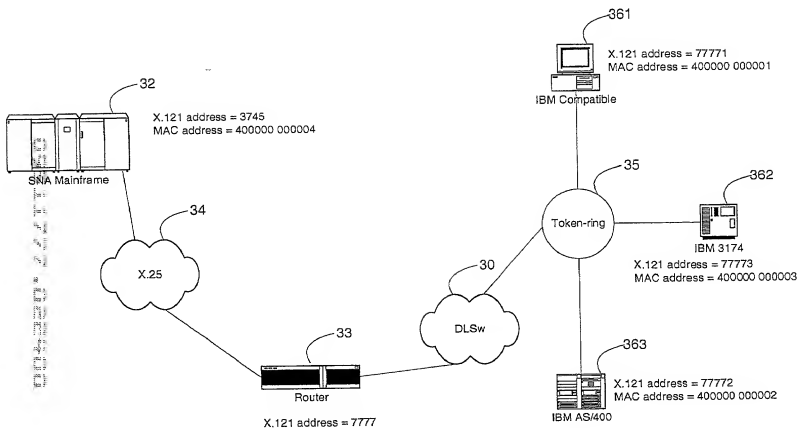


FIG. 3 300

PRIOR ART

Upstream Side

Downstream Side

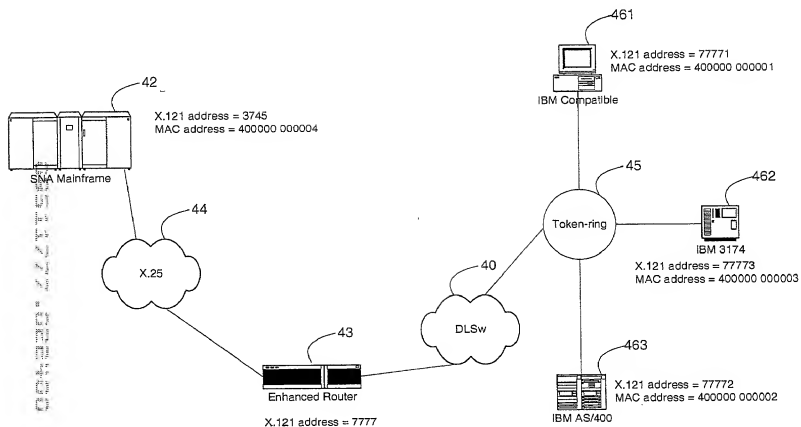


FIG. 4 400

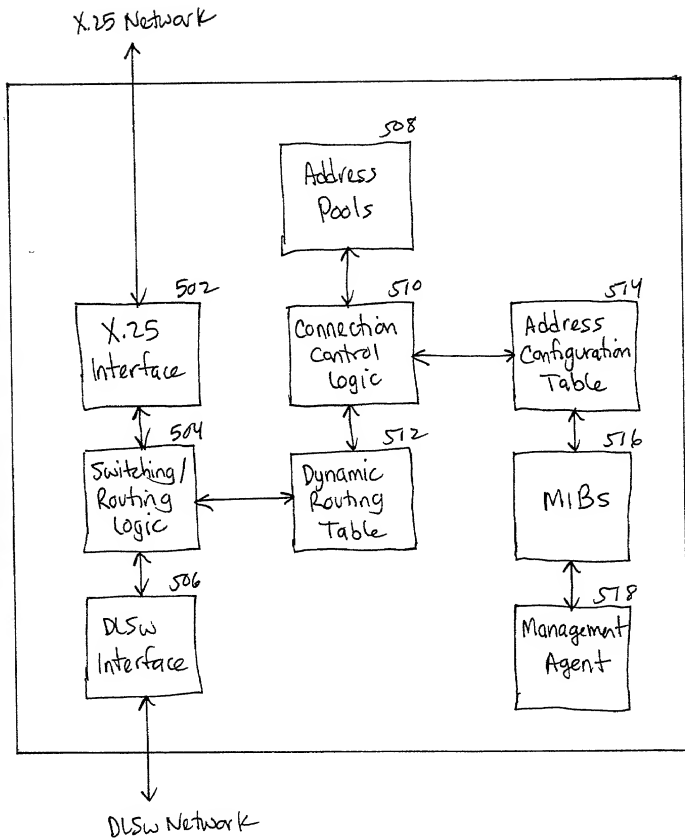


FIG. 5 500

Wildcard Character	Function
C	Matches any character, except those listed below. An ordinary character (like a, b, 7, or 5) matches only itself.
. (Dot or period) (. = hex 2E)	Matches a single character  Example: PC._map  Matches: PC1_map and PC2_map
^ (Caret or circumflex) (^ = hex 5E)	The caret or circumflex has special meaning only when it's the leftmost character in the wildcard expression. As such, it constrains the expression to match the leftmost portion of a line. A match of this type is called an "anchored match," because it is "anchored to a specific place in the line.
\$ (Currency symbol) (\$ = hex 24)	The currency symbol has special meaning only when it's the rightmost character in the wildcard expression. As such, it constrains the expression to match the rightmost portion of a line. A match of this type is called an "anchored match," because it is "anchored to a specific place in the line.
[c...] ([ = hex 5B) (] = hex 5D)	As the rightmost element in a string, this element tells the wildcard to match any one of the characters enclosed in the brackets.  Example: Map_[abc]  Matches: Map_a, Map_b, or Map_c
[^c...] (^ = hex 5E)	When a caret is the first character of the bracketed string, the wildcard expression matches any character except those in the remainder of the string.  Example: [^45678]  Matches any character except 4, 5, 6, 7, or 8.
[l-r] (- = hex 2D)	The minus sign between two characters indicates a range of consecutive ASCII characters to match. This bracketed string of characters is known as a character class.  Example: [0-9]  Matches: 0, 1, 2, 3, 4, 5, 6, 7, 8, and 9

Rule/ Operator	Interpretation
? (Question Mark)	A single-character regular expression followed by a question mark (?) matches zero or exactly one occurrence of that single-character regular expression.  Example: [0-9]?
(?=hex 3F)	Matches: any string of either zero or exactly one digit.
* (Asterisk)	A single character regular expression followed by an asterisk (*) matches zero or more occurrences of that single-character regular expression.  Example: [0-9]*
(* =hex 2A)	Matches: any string of zero or more digits.
+ (Plus Sign)	A single-character regular expression followed by a plus sign (+) matches one or more occurrences of that single-character regular expression.  Example: [0-9]+
(+ =hex 2B)	Matches: any string with one or more digits.
{m} {m,} {m,n}  (Where m and n are integers)	A one-character regular expression followed by {m}, {m,}, or {m,n} is a regular expression that matches a range of occurrences of the one-character regular expression. The values m and n must be non-negative integers less than 255. The symbols in braces mean the following:  {m} matches exactly m occurrences  {m,} matches at least m occurrences  {m,n} matches any number of occurrences between m and n.
((=hex 7B) ( ) =hex 7D) (, =hex 2C)	Whenever a choice exists, the regular expression matches as many occurrences as possible.

	802	804	806	808	810
	Map Name	Adjacent X.121 Address	Partner X.121 Address	Adjacent MAC Address	Partner MAC Address
812 -	AS400_map	77772	4444	400000000002	400000000004
814 -	3174_map	77773	4444	400000000003	400000000004
816 -	PC_map	77771	4444	400000000001	400000000004

FIG. 8 800  
PRIOR ART

	902	904	906	908	910	911
	Map Name	Adjacent X.121 Address	Partner X.121 Address	Adjacent MAC Address	Partner MAC Address	Flag
912 -	Host1_map	.*	4444	(nil)	400000000004	0

FIG. 9 900

	1004	1006	1007	1008	1010
	Adjacent X.121 Address	Partner X.121 Address	X.25 LCN	Adjacent MAC Address	Partner MAC Address
1012 -	77772	4444	1	400000000005	400000000004

FIG. 10 1000

	1102	1104	1106	1108	1110
	Map Name	Adjacent X.121 Address	Partner X.121 Address	Adjacent MAC Address	Partner MAC Address
1112 -	AS400_map	3745	77772	400000000004	400000000002
1114 -	3174_map	3745	77773	400000000004	400000000003
1116 -	PC_map	3745	77771	400000000004	400000000001

FIG. 11 1100  
PRIOR ART

	1202	1204	1206	1208	1210	1211
	Map Name	Adjacent X.121 Address	Partner X.121 Address	Adjacent MAC Address	Partner MAC Address	Flag
1212 -	NPSI_host	3745	7777	400000000004	.*	1

FIG. 12 1200

	1304	1306	1307	1308	1310
	Adjacent X.121 Address	Partner X.121 Address	X.25 LCN	Adjacent MAC Address	Partner MAC Address
1312 -	3745	7777	2	400000000004	400000000002

FIG. 13 1300

	1402	1404	1406	1408	1410	1411
	Map Name	Adjacent X.121 Address	Partner X.121 Address	Adjacent MAC Address	Partner MAC Address	Flag
1412 -	NPSI_host	3745	(nil)	400000000004	.*	1

FIG. 14 1400

	1504	1506	1507	1508	1510
	Adjacent X.121 Address	Partner X.121 Address	X.25 LCN	Adjacent MAC Address	Partner MAC Address
1512 -	3745	8888	1	400000000004	400000000002

FIG. 15 1500



operator	Interpretation
(...) (Regular expression(s) enclosed in parentheses)	A regular expression enclosed within parentheses matches whatever the unadorned regular expression matches. You use parentheses to group a series of regular expressions that you want to have treated as a single-character regular expression. Example: 0[Xx]? Matches: 0, 0X, or 0x Example: (0[Xx])? Matches: nothing, 0X, or 0x.
((=hex 28) ()=hex 29)	You can have up to nine such substrings in a regular expression, and you can nest parentheses.
(Vertical Bar) (  = hex 7c)	Two regular expressions separated by the vertical bar ( ) match either a match for the first or a match for the second. Example: 7777(12 16) Matches: 777712 or 777716
[ ] (Square Brackets) ([=hex 5B) (]=hex 5D)	Matches any single character in the bracketed set. Example: 40000000000[123] Matches: 400000000001, 400000000002, or 400000000003

FIG. 16 1600

Docket No.

2204/A14

# Declaration and Power of Attorney For Patent Application

## English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

### ENCODING ADDRESSES IN A COMMUNICATION SYSTEM

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International

Application Number \_\_\_\_\_

and was amended on \_\_\_\_\_

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

60/121,661

February 25, 1999

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)  
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)  
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)  
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Bruce D. Sunstein	Reg. No. 27,234	Jay Sandvos	Reg. No. 43,900
Robert M. Asher	Reg. No. 30,445	Sonia K. Guterman	Reg. No. 44,729
Timothy M. Murphy	Reg. No. 33,198	Keith J. Wood	Reg. No. 45,235
Steven G. Saunders	Reg. No. 36,265	Mary M. Steubing	Reg. No. 37,946
Harriet M. Strimpel	Reg. No. 37,008	Christopher J. Cianciolo	Reg. No. 42,417
Samuel J. Petuchowski	Reg. No. 37,910	Lindsay J. McGuinness	Reg. No. 38,549
Jeffrey T. Klayman	Reg. No. 39,250		
John J. Stickevers	Reg. No. 39,387		
Herbert A. Newborn	Reg. No. 42,031		
Elizabeth P. Morano	Reg. No. 42,904		
Jean M. Tibbetts	Reg. No. 43,193		

Send Correspondence to: **Jeffrey T. Klayman**  
**Bromberg & Sunstein LLP**  
 125 Summer Street  
 Boston, MA 02110

Direct Telephone Calls to: *(name and telephone number)*  
**Jeffrey T. Klayman (617) 443-9292**

Full name of sole or first inventor

**Okoziem Allen**

Sole or first inventor's signature

Date

Residence

**R5 Snow Circle, Nashua, NH 03062**

Citizenship

**U.S.**

Post Office Address

**same as residence**

Full name of second inventor, if any

**Richard Crump**

Second inventor's signature

Date

Residence

**295 Beacon Street, Boston, MA 02117**

Citizenship

**U.S.**

Post Office Address

**same as residence**